

1

KR-1



KR-2



KR-3






Galvanized

Stainless

-40 - +80 °C

RoHS

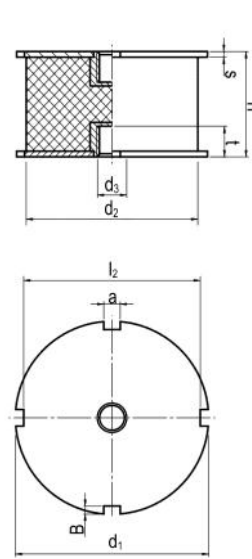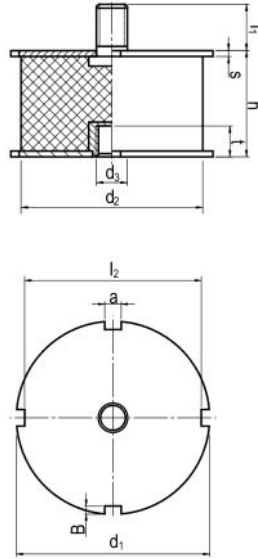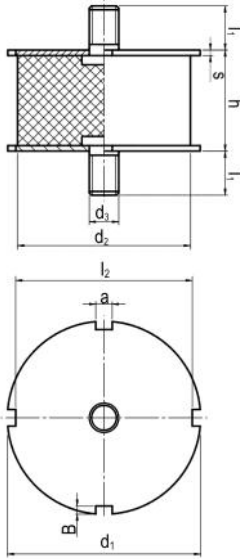

3

4

5

6

2

d ₁	d ₂	h	d ₃	l ₁	l ₂	t	s	a	B	1	2	3
105	94	40	M16	41	95,5	16	3	9	4,5	•	•	•
105	94	55	M16	41	95,5	16	3	9	4,5	•	•	•

Appearance

- **Elastomer (default natural rubber, NK)**
 - Operation temperature -40 - +80 °C
 - Should not be used at oil, alkaline, acid
 - You can find other opportunities at the Elastomer

7

- **Hardness (default 55 +/-5 Shore A)**

- 43 (soft)
- 55 (medium)
- 72 (hard)

8

- **Metal insert**

- ST37 (galvanized, DIN EN 12329 – Fe//Zn12//A)
- A2 (stainless, AISI 304)
- A4 (stainless, AISI 316)

9

Use

This part is specialized for the twisting and oscillating movements. Because of the special gaps it is easy to fix.

Nailed vibration damper

1 2 3 4 5 6 7 8 9
KR-1 105/55 M16x41 NK 55 +/-5 SH A, ST37

- 1 Product code
- 2 Type
- 3 Diameter (d₁)
- 4 Height (h)
- 5 Thread size (d₃)
- 6 Thread length(l)
- 7 Elastomer
- 8 Hardness
- 9 Metal quality