

LF 7, LF 25, LF 50,
LF 100, LF 200



LF 400, LF 600, LF 1500





Galvanized

Stainless

-40 - +80 °C

RoHS

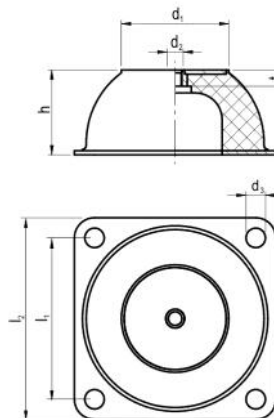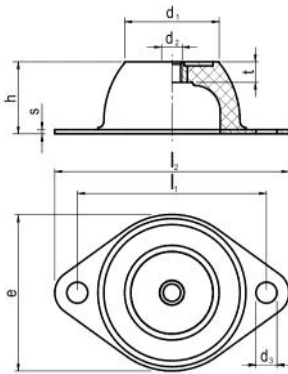

1

Item code	d ₁	h	d ₂	t	l ₁	l ₂	d ₃	e	M _{max} (kg)	
									40 SHA	60 SHA
LF 0007	18	20	M6	7	50	64	7	43	3,5	9
LF 0025	33	25	M8	9	66	85	8	56	20	50
LF 0050	45	35	M10	11	92	114	10	76	40	80
LF 0100	53	40	M10	11	110	136	11,5	96	70	150
LF 0200	58	45	M10	11	124	151	11,5	101	130	220
LF 0400	78	63	M12	13	120	150	14,5		280	500
LF 0600	100	85	M16	16	160	200	14,5		380	750
LF 1500	186	160	M24	40	250	310	18		1400	2500

Appearance

- Elastomer (default natural rubber, NK)**
 - Operation temperature -40 - +80 °C
 - Should not be used at oil, alkaline, acid
 - You can find other opportunities at the Elastomer
- Hardness (default 40 or 60 +/-5 Shore A)**
 - 40 (soft)
 - 60 (medium)
 - 70 (hard)
- Metal insert**
 - ST37 (galvanized, DIN EN 12329 – Fe//Zn12//A)
 - A2 (stainless, AISI 304)
 - A4 (stainless, AISI 316)

Use

The group of the LF vibration dampers were developed absorbing for the low frequency vibrations. These are perfects for absorbing the impact energy. Use: compressors, fans, vibrating feeders, pumps, electric engines

LF vibration damper

1 2 3 4
LF 400 NK 60 +/-5 SH A, ST37

1	Item code
2	Elastomer
3	Hardness
4	Metal quality