


1

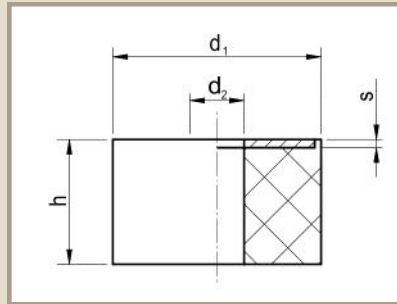

- Galvanized
- Stainless
- 40 - +80 °C
- RoHS

2

Item code	d <sub>1</sub>	d <sub>2</sub>	h	S
15/6,5-12	15	6,5	12	2
15/6,5-15	15	6,5	15	2
15/6,5-20	15	6,5	20	2
15/6,5-25	15	6,5	25	2
20/8,5-15	20	8,5	15	2
20/8,5-20	20	8,5	20	2
20/8,5-25	20	8,5	25	2
20/8,5-30	20	8,5	30	2
20/8,5-40	20	8,5	40	2
25/10,5-20	25	10,5	20	2
25/10,5-25	25	10,5	25	2
25/10,5-30	25	10,5	30	2
25/10,5-40	25	10,5	40	2
30/13,5-30	30	13,5	30	2
30/13,5-40	30	13,5	40	2
30/13,5-50	30	13,5	50	2
40/13,5-30	40	13,5	30	2
40/13,5-40	40	13,5	40	2
40/13,5-50	40	13,5	50	2
40/13,5-60	40	13,5	60	2

2

Item code	d <sub>1</sub>	d <sub>2</sub>	h	s
50/17-30	50	17	30	2
50/17-40	50	17	40	2
50/17-50	50	17	50	2
50/17-60	50	17	60	2
50/17-80	50	17	80	2
60/17-30	60	17	30	2
60/17-40	60	17	40	2
60/17-50	60	17	50	2
60/17-60	60	17	60	2
80/21-30	80	21	30	3
80/21-40	80	21	40	3
80/21-50	80	21	50	3
80/21-60	80	21	60	3
80/21-80	80	21	80	3
100/21-30	100	21	30	3
100/21-40	100	21	40	3
100/21-50	100	21	50	3
100/21-60	100	21	60	3
100/21-80	100	21	80	3
100/21-100	100	21	100	3

**Appearance**

- **Elastomer (default natural rubber, NK)**
  - Operation temperature -40 - +80 °C
  - Should not be used at oil, alkaline, acid
  - You can find other opportunities at the Elastomer
- **Hardness (default 55 +/-5 Shore A)**
  - 43 (soft)
  - 55 (medium)
  - 72 (hard)
- **Metal insert**
  - ST37 (galvanized, DIN EN 12329 – Fe//Zn12//A)
  - A2 (stainless, AISI 304)
  - A4 (stainless, AISI 316)

**Use**

The through hole vibration dampers are very popular. They are easy to install, the productions are fast and affordable, and the vibration effect are excellent. At the IS you can find metal insert at both sides.

**Through hole vibration damper**

1	Product group
2	Item code
3	Elastomer
4	Hardness
5	Metal quality

IS 20/8,5-40 NK 55 +/-5 SH A, ST37