


1

GH

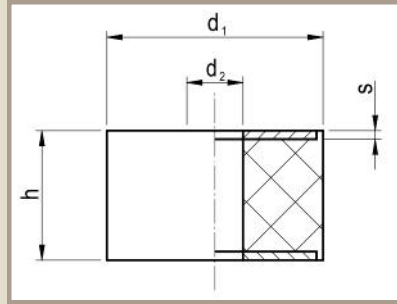

Galvanized

Stainless

-40 - +80 °C

RoHS

2

Item code	d <sub>1</sub>	d <sub>2</sub>	h	S
15/6-25	15	6	25	2
20/6-25	20	6	25	2
25/6,6-20	25	6,6	20	2
30/16-15	30	16	15	2
35/13-20	35	13	20	2
35/19-15	35	19	15	2
40/13-20	40	13	20	2
40/13-30	40	13	30	2
40/13-40	40	13	40	2
40/17,5-9	40	17,5	9	2
50/10-30	50	10	30	2
50/11-25	50	12	25	2
50/13-25	50	13	25	2
50/16,5-13	50	16,5	13	2
50/17-20	50	17	20	2
50/17-30	50	17	30	2
50/17-40	50	17	40	2
50/17-50	50	17	50	2
50/21-15	50	21	15	2
50/21-30	50	21	30	2

2

Item code	d <sub>1</sub>	d <sub>2</sub>	h	s
60/10,5-30	60	10,5	30	2
60/18-30	60	18	30	2
60/20,5-13	60	20,5	13	2
60/21-50	60	21	50	2
60/21,5-30	60	21,5	30	2
75/25-30	75	25	30	3
75/25-55	75	25	55	3
100/21-60	100	21	60	3
125/35-80	125	35	80	3
125/35-125	125	35	125	3
150/51-100	150	51	100	4

### Appearance

- **Elastomer (default natural rubber, NK)**
  - Operation temperature -40 - +80 °C
  - Should not be used at oil, alkaline, acid
  - You can find other opportunities at the Elastomer

3

- **Hardness (default 55 +/-5 Shore A)**

- 43 (soft)
- 55 (medium)
- 72 (hard)

4

- **Metal insert**

- ST37 (galvanized, DIN EN 12329 – Fe//Zn12//A)
- A2 (stainless, AISI 304)
- A4 (stainless, AISI 316)

5

### Use

The through hole vibration dampers are very popular. They are easy to install, the productions are fast and affordable, and the vibration effect are excellent. At the GH you can find metal insert at both sides.

### Through hole vibration damper

1 2 3 4 5  
GH 50/10-30 NK 55 +/-5 SH A, ST37

1	Product group
2	Item code
3	Elastomer
4	Hardness
5	Metal quality