


1

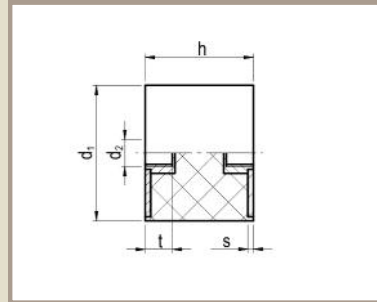

- Galvanized
- 40 - +80 °C
- RoHS

2

3

4

d ₁	h									d ₂	t
3/8"	1/2"									UNC8-32	3/16"
9/16"	1/2"									UNF10-32	3/16"
5/8"	1/2"									UNC8-32	3/16"
3/4"	3/4"									UNC1/4-20	1/4"
1"	3/4"	1"								UNC1/4-20	1/4"
1"	1"									UNC5/16-18	5/16"
1 1/4"	3/4"	1"								UNC1/4-20	1/4"
1 1/4"	1"									UNC5/16-18	5/16"
1 3/8"	1"									UNC5/16-18	5/16"
1 1/2"	1"									UNC5/16-18	5/16"
1 1/2"	1"									UNC3/8-16	3/8"
1 9/16"	1"									UNC5/16-18	5/16"
1 9/16"	1"									UNC3/8-16	3/8"
2"	1 5/8"	2"								UNC3/8-16	3/8"
2 7/16"	1 1/4"									UNC1/2-13	1/2"
3 1/8"	2 1/4"									UNC1/2-13	1/2"

Appearance

- Elastomer (default natural rubber, NK)**
 - Operation temperature -40 - +80 °C
 - Should not be used at oil, alkaline, acid
 - You can find other opportunities at the Elastomer
- Hardness (alapesetben 55 +/-5 Shore A)**
 - 43 (soft)
 - 55 (medium)
 - 72 (hard)
- Metal insert**
 - ST37 (galvanized, DIN EN 12329 – Fe//Zn12//C)
 - A2 (stainless, AISI 304)

Use

Perfect for absorbing vibration generated by pumps, fans, washing machines, electric engines, control cabinets and other industrial and agricultural equipments.

Advantages: easy to assemble, high flexibility, economy, longevity.

Cylindrical bobbin

1	Type
2	Diameter (d ₁) [inch]
3	Height (h) [inch]
4	Thread size (d ₂)
5	Elastomer
6	Hardness
7	Metal quality

IG-3 1 - 1 UNC1/4-20 NK 55 +/-5 SH A, ST37