


1

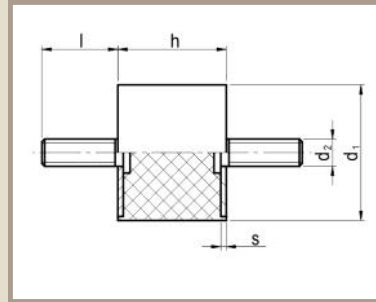

- Galvanized
- 40 - +80 °C
- RoHS

2

3

4

5

| d <sub>1</sub> | h      |        |    | d <sub>2</sub> | l      |        |  |
|----------------|--------|--------|----|----------------|--------|--------|--|
| 3/8"           | 1/2"   |        |    | UNC8-32        | 1/2"   |        |  |
| 9/16"          | 1/2"   |        |    | UNF10-32       | 3/8"   |        |  |
| 5/8"           | 1/2"   |        |    | UNC8-32        | 1/2"   |        |  |
| 3/4"           | 3/4"   |        |    | UNC1/4-20      | 1/2"   |        |  |
| 1"             | 1/2"   | 3/4"   | 1" | UNC1/4-20      | 1/2"   | 5/8"   |  |
| 1"             | 1/2"   | 3/4"   | 1" | UNC5/16-18     | 5/8"   |        |  |
| 1 1/4"         | 3/4"   | 1"     |    | UNC1/4-20      | 1/2"   |        |  |
| 1 1/4"         | 3/4"   | 1"     |    | UNC5/16-18     | 5/8"   |        |  |
| 1 3/8"         | 1"     |        |    | UNC5/16-18     | 5/8"   | 3/4"   |  |
| 1 1/2"         | 3/4"   | 1"     |    | UNC5/16-18     | 5/8"   |        |  |
| 1 1/2"         | 3/4"   | 1"     |    | UNC3/8-16      | 5/8"   |        |  |
| 1 9/16"        | 1"     |        |    | UNC5/16-18     | 5/8"   |        |  |
| 1 9/16"        | 1"     |        |    | UNC3/8-16      | 5/8"   |        |  |
| 2"             | 3/4"   | 1 5/8" | 2" | UNC3/8-16      | 5/8"   | 1 1/8" |  |
| 2 7/16"        | 1 1/4" |        |    | UNC1/2-13      | 7/8"   |        |  |
| 3 1/8"         | 2 1/4" |        |    | UNC1/2-13      | 1 1/4" |        |  |

**Appearance**

- Elastomer (default natural rubber, NK)**
  - Operation temperature -40 - +80 °C
  - Should not be used at oil, alkaline, acid
  - You can find other opportunities at the Elastomer
- Hardness (default 55 +/-5 Shore A)**
  - 43 (soft)
  - 55 (medium)
  - 72 (hard)
- Metal insert**
  - ST37 (galvanized, DIN EN 12329 – Fe//Zn12//C)
  - A2 (stainless, AISI 304)

**Use**

Perfect for absorbing vibration generated by pumps, fans, washing machines, electric engines, control cabinets and other industrial and agricultural equipments.

Advantages: easy to assemble, high flexibility, economy, longevity.

**Cylindrical bobbin**

|   |                                   |
|---|-----------------------------------|
| 1 | Type                              |
| 2 | Diameter (d <sub>1</sub> ) [inch] |
| 3 | Height (h) [inch]                 |
| 4 | Thread size (d <sub>2</sub> )     |
| 5 | Thread length (l) [inch]          |
| 6 | Elastomer                         |
| 7 | Hardness                          |
| 8 | Metal quality                     |

IG-1 1 - 1 UNC1/4-20x1/2 NK 55 +/-5 SH A, ST37