


1

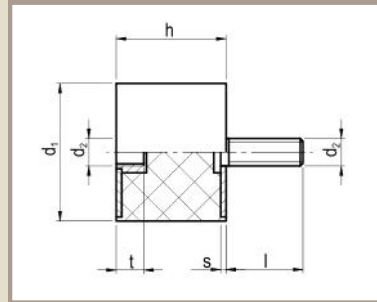

- Galvanized
- 40 - +80 °C
- RoHS

2

3

4

5

d ₁	h			d ₂	l	t
3/8"	1/2"			UNC8-32	1/2"	3/16"
9/16"	1/2"			UNF10-32	3/8"	3/16"
5/8"	1/2"			UNC8-32	1/2"	3/16"
3/4"	3/4"			UNC1/4-20	1/2"	1/4"
1"	1/2"	3/4"	1"	UNC1/4-20	1/2"	5/8"
1"	1/2"	3/4"	1"	UNC5/16-18	5/8"	5/16"
1 1/4"	3/4"	1"		UNC1/4-20	1/2"	1/4"
1 1/4"	3/4"	1"		UNC5/16-18	5/8"	5/16"
1 3/8"	1"			UNC5/16-18	5/8"	3/4"
1 1/2"	3/4"	1"		UNC5/16-18	5/8"	5/16"
1 1/2"	3/4"	1"		UNC3/8-16	5/8"	3/8"
1 9/16"	1"			UNC5/16-18	5/8"	5/16"
1 9/16"	1"			UNC3/8-16	5/8"	3/8"
2"	3/4"	1 5/8"	2"	UNC3/8-16	5/8"	1 1/8"
2 7/16"	1 1/4"			UNC1/2-13	7/8"	1/2"
3 1/8"	2 1/4"			UNC1/2-13	1 1/4"	1/2"

Appearance

- Elastomer (default natural rubber, NK)**
 - Operation temperature -40 - +80 °C
 - Should not be used at oil, alkaline, acid
 - You can find other opportunities at the Elastomer
- Hardness (default 55 +/-5 Shore A)**
 - 43 (soft)
 - 55 (medium)
 - 72 (hard)
- Metal insert**
 - ST37 (galvanized, DIN EN 12329 – Fe//Zn12//C)
 - A2 (stainless, AISI 304)

Use

Perfect for absorbing vibration generated by pumps, fans, washing machines, electric engines, control cabinets and other industrial and agricultural equipments.

Advantages: easy to assemble, high flexibility, economy, longevity.

Cylindrical bobbin

1	Type
2	Diameter (d ₁) [inch]
3	Height (h) [inch]
4	Thread size (d ₂)
5	Thread length (l) [inch]
6	Elastomer
7	Hardness
8	Metal quality

IG-2 1 - 1 UNC1/4-20x1/2 NK 55 +/-5 SH A, ST37