


3

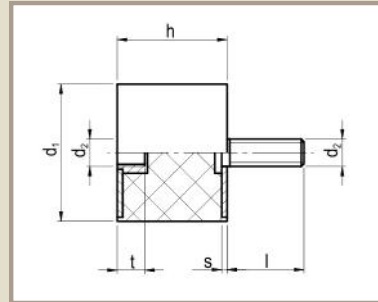

- Galvanized
- Stainless
- UNC
- 40 - +80 °C
- RoHS

1

2

4

5

| d ₁ | h | | | | | | | | | | d ₂ | l | t | S _{min} |
|----------------|-----|----|----|----|----|-----|-----|-----|----|-----|----------------|----|----|------------------|
| 6 | 7 | 8 | 10 | 13 | - | - | - | - | - | - | M3 | 6 | 3 | 0,8 |
| 8 | 6 | 8 | 10 | 13 | 15 | - | - | - | - | - | M3 | 6 | 3 | 1 |
| 10 | 8 | 10 | 12 | 15 | 18 | 20 | - | - | - | - | M4 | 10 | 4 | 1,2 |
| 15 | 8 | 10 | 12 | 15 | 20 | 25 | - | - | - | - | M4 | 10 | 4 | 1,4 |
| 18 | 13 | 15 | - | - | - | - | - | - | - | - | M6 | 18 | 6 | 2 |
| 20 | 10 | 13 | 15 | 20 | 25 | 30 | - | - | - | - | M6 | 18 | 6 | 2 |
| 25 | 10 | 15 | 20 | 25 | 30 | 40 | - | - | - | - | M6 | 18 | 6 | 2 |
| 30 | 15 | 20 | 25 | 30 | 35 | 40 | - | - | - | - | M8 | 20 | 8 | 2 |
| 40 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | - | - | M8 | 23 | 8 | 2 |
| 50 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 60 | - | - | M10 | 28 | 10 | 2 |
| 60 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 60 | - | - | M10 | 28 | 10 | 2 |
| 70 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | - | M10 | 27 | 10 | 3 |
| 75 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | - | M12 | 37 | 12 | 3 |
| 80 | 30 | 40 | 50 | 60 | 80 | - | - | - | - | - | M12 | 37 | 12 | 3 |
| 100 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 75 | 100 | M16 | 41 | 16 | 3 |
| 125 | 40 | 55 | 60 | 70 | 75 | 100 | 125 | - | - | - | M16 | 41 | 16 | 3 |
| 150 | 45 | 50 | 55 | 60 | 75 | 100 | 120 | 150 | - | - | M16 | 41 | 16 | 4 |
| 164 | 75 | - | - | - | - | - | - | - | - | - | M16 | 41 | 16 | 4 |
| 200 | 100 | - | - | - | - | - | - | - | - | - | M20 | 40 | 20 | 5 |

Appearance

- Elastomer (default natural rubber, NK)**
 - Operation temperature -40 - +80 °C
 - Should not be used at oil, alkaline, acid
 - You can find other opportunities at the Elastomer
- Hardness (default 55 +/-5 Shore A)**
 - 43 (soft)
 - 55 (medium)
 - 72 (hard)
- Metal insert**
 - ST37 (galvanized, DIN EN 12329 – Fe//Zn12//A)
 - A2 (stainless, AISI 304)
 - A4 (stainless, AISI 316)

Use

Perfect for absorbing vibration generated by pumps, fans, washing machines, electric engines, control cabinets and other industrial and agricultural equipments.

Advantages: easy to assemble, high flexibility, economy, longevity.

Cylindrical vibration dampers

| | |
|---|-------------------------------|
| 1 | Diameter (d ₁) |
| 2 | Height (h) |
| 3 | Type |
| 4 | Thread size (d ₂) |
| 5 | Thread length (l) |
| 6 | Elastomer |
| 7 | Hardness |
| 8 | Metal quality |

40/30-2 M8x23 NK 55 +/-5 SH A, ST37