


3

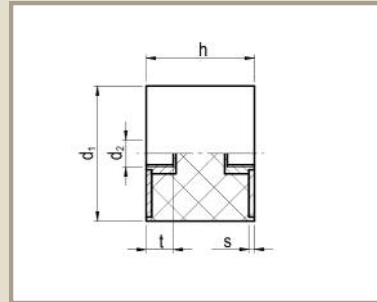

- Galvanized
- Stainless
- UNC
- 40 - +80 °C
- RoHS

1

2

4

d <sub>1</sub>	h										d <sub>2</sub>	t	S <sub>min</sub>
6	7	8	10	13	-	-	-	-	-	-	M3	3	0,8
8	8	10	13	15	-	-	-	-	-	-	M3	3	1
10	10	12	15	18	20	-	-	-	-	-	M4	4	1,2
15	10	12	15	20	25	-	-	-	-	-	M4	4	1,4
18	15	-	-	-	-	-	-	-	-	-	M6	6	2
20	15	20	25	30	-	-	-	-	-	-	M6	6	2
25	15	20	25	30	40	-	-	-	-	-	M6	6	2
30	20	25	30	35	40	-	-	-	-	-	M8	8	2
40	20	25	30	35	40	45	50	-	-	-	M8	8	2
50	25	30	35	40	45	50	60	-	-	-	M10	10	2
60	25	30	35	40	45	50	60	-	-	-	M10	10	2
70	25	30	35	40	45	50	55	60	70	-	M10	10	3
75	30	35	40	45	50	55	60	70	-	-	M12	12	3
80	30	40	50	60	80	-	-	-	-	-	M12	12	3
100	40	45	50	55	60	75	100	-	-	-	M16	16	3
125	40	55	60	70	75	100	125	-	-	-	M16	16	3
150	45	50	55	60	75	100	120	150	-	-	M16	16	4
164	75	-	-	-	-	-	-	-	-	-	M16	16	4
200	100	-	-	-	-	-	-	-	-	-	M20	20	5

**Appearance**

- Elastomer (default natural rubber, NK)**
  - Operation temperature -40 - +80 °C
  - Should not be used at oil, alkaline, acid
  - You can find other opportunities at the Elastomer
- Hardness (default 55 +/-5 Shore A)**
  - 43 (soft)
  - 55 (medium)
  - 72 (hard)
- Metal insert**
  - ST37 (galvanized, DIN EN 12329 – Fe//Zn12//A)
  - A2 (stainless, AISI 304)
  - A4 (stainless, AISI 316)

**Use**

Perfect for absorbing vibration generated by pumps, fans, washing machines, electric engines, control cabinets and other industrial and agricultural equipments.

Advantages: easy to assemble, high flexibility, economy, long life.

Cylindrical vibration dampers

**1 2 3 4 5 6 7**

**40/30-3 M8 NK 55 +/-5 SH A, ST37**

1	Diameter (d <sub>1</sub> )
2	Height (h)
3	Type
4	Thread size (d <sub>2</sub> )
5	Elastomer
6	Hardness
7	Metal quality